

L2190


Framing Nailers

21 Degree Strip Framing Nailer

APACH
BUILDING FUTURES



L2190

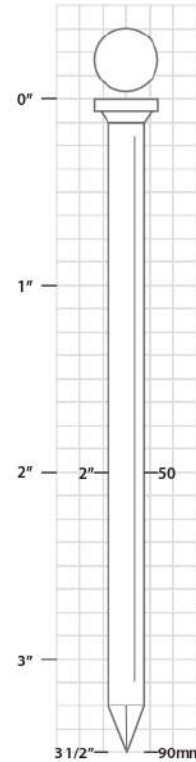

▲ Features

- 360° Adjustable Air Deflector
- Depth-of-Drive Adjustment
- Toe-Nailing Teeth for Slip-Free Grip
- No-Mar Rubber Pad
- Sequential Fire Trigger Available (#30805301A)
- Dry-Fire Lock

▲ Applications

- Roofing, Carpentry
- Framing, Joiner
- Door, Window, Trimming, Picture Frames, Building Components
- Packaging, Crating, Pallets
- Industrial, Pre-Fabricated Housing

▲ Fasteners

- 21° Full Head Plastic Collated Strip Nails
- Ø .113 - .161" / 2.87 - 4.1 mm

▲ Tool Specifications

Weight	Dimensions (L x W x H)	Operating Pressure	Lead Capacity
3.65 kgs	465 x 115 x 370 mm	5 - 7 kg / cm ²	60 nails
8 lb	18.3" x 4.5" x 14.6"	70 - 100 psi	60 nails

APACH INDUSTRIAL CO., LTD.

176 Industrial 9th Rd., Tali Dist., Taichung City, Taiwan 41280
Tel +886 4 2491 5576 Fax +886 4 2491 5580
www.apach.com.tw

