

# LHT-64


## Framing Nailers

14 GA Concrete Nailer, Heavy Duty

**APACH**  
BUILDING FUTURES



LHT-64

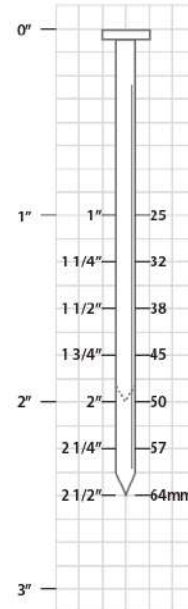

### Features

- Accept Both .086 & .098" / 2.2 & 2.5 mm Concrete Nails
- 360° Adjustable Air Deflector
- Powerful
- Well Balanced
- Quick Release Bolted Nose
- Sequential Trigger Mode, Can be Adjusted to Bump Fire Mode without Changing Parts

### Applications

- Roong, Carpentry
- Framing, Joiner
- Door, Window, Trimming, Picture Frames, Building Components
- Cabinets, Furniture, Light Wood Assembly
- Packaging, Crating, Pallets
- Industrial, Pre-Fabricated Housing

### Fasteners

- Concrete Nails
- $\varnothing$  .086 & .098" / 2.2 & 2.5 mm

### Tool Specifications

Weight	Dimensions (L x W x H)	Operating Pressure	Lead Capacity
2.7 kgs	282 x 94 x 306 mm	5 - 7 kg / cm <sup>2</sup>	80 nails
5.94 lbs	11.1" x 3.7" x 12.5"	70 - 100 psi	80 nails

### APACH INDUSTRIAL CO., LTD.

176 Industrial 9th Rd., Tali Dist., Taichung City, Taiwan 41280  
Tel +886 4 2491 5576 Fax +886 4 2491 5580  
www.apach.com.tw

