

L3490


Framing Nailers

34 Degree Strip Framing Nailer

APACH
BUILDING FUTURES



L3490

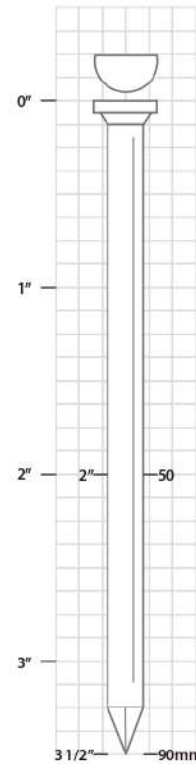

▲ Features

- 360° Adjustable Air Deflector
- Depth-of-Drive Adjustment
- Toe-Nailing Teeth for Slip-Free Grip
- No-Mar Rubber Pad
- Sequential Fire Trigger Available (#30805301A)
- Dry-Fire Lock

▲ Applications

- Roofing, Carpentry
- Framing, Joiner
- Door, Window, Trimming, Picture Frames, Building Components
- Packaging, Crating, Pallets
- Industrial, Pre-Fabricated Housing

▲ Fasteners

- 34° D Head Paper Tape Collated Strip Nails
- Ø .113 - .161" / 2.87 - 4.1 mm

▲ Tool Specifications

| Weight | Dimensions (L x W x H) | Operating Pressure | Lead Capacity |
|----------|------------------------|----------------------------|---------------|
| 3.65 kgs | 465 x 115 x 370 mm | 5 - 7 kg / cm ² | 75 - 90 nails |
| 8 lbs | 18.3" x 4.5" x 14.6" | 70 - 100 psi | 75 - 90 nails |

APACH INDUSTRIAL CO., LTD.

176 Industrial 9th Rd., Tali Dist., Taichung City, Taiwan 41280
Tel +886 4 2491 5576 Fax +886 4 2491 5580
www.apach.com.tw

